

NEXiiO

NEXP010900ABS4

INDOOR TOUCH PANEL

Elegant touch screen for your home

The **NEXiiO** NEXP010900ABS4 multifunctional smart home control, with an Android operating system, provides audio and video communication with door phones via SIP 2.0 protocol. It delivers the ultimate touch screen experience.

- Support TF card, U disk local playback
- Dimension: 86x86x38mm
- Working Humidity: 10~80%
- Working Temperature: -10°C ~ +45°C
- Storage Temperature: -20°C ~ +70°C

PHYSICAL & POWER


- Front panel: Fully touch, tempered glass
- RAM/ROM: 1GB / 8GB
- Display: 4 inch IPS LCD
- Screen: 4 Inch capacitive touch screen
- Wi-Fi: IEEE802.11 b/g/n, @ 2.4GHz
- Camera: None
- RS485 port: Support
- Bell in: 1
- Microphone: -58db
- Output: 2* 25W
- Ethernet ports: 1xRJ45, 10/100Mbps
- 110~220 VAC connector
- Installation: Wall-mounted

TOUCH SCREEN DISPLAY

- Display Mode: Normally black
- LCD Size: 4 inch (Diagonal)
- Resolution: 480 * 480

INTERCOM AUDIO

- SIP v1 (RFC2543), SIP v2 (RFC3261)
- Narrowband audio codec: G.711a, G.711μ
- DTMF: In-band, out-of-band DTMF (RFC2833), SIP Info
- Echo Cancellation
- Automatic Gain Control

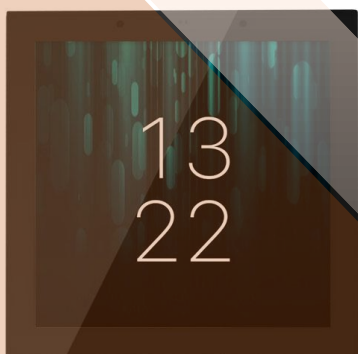

NEXiio

NEXP010900ABS4

INTERCOM VIDEO

- Streaming formats: H.264

NETWORKING

- Protocols support: IPv4, HTTP, HTTPS, DNS, SNTP, RTSP, SRTP, RTP, TCP, UDP, TLS, ICMP, DHCP, ARP, AIRPLAY, Bluetooth AVRCP 5


SMART HOME

- Protocol: UAP
- Controlling feature: Support all UAP Devices
- Music playback
- Bell function with customized scene
- Limited Scenario features
- Control from iOS and Android App
- YwaY: Support YwaY tunnel and client mode
- User friendly

- Internal backup and restore
- Bell Camera: RTSP supported
- OTA Update

APPLICATION

- Villas
- Apartment complex
- Factories
- Hospitals
- Control centers

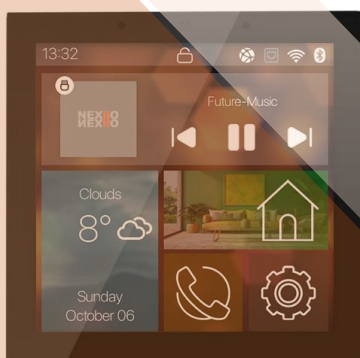

Company
Location
Phone
Email
Website

UAB **NEXiio**
Gedimino pr. 20, Vilnius, LT 01103
+370 5 2499995
info@nexiio.com
www.nexiio.eu